

GV Putt



LEAD

USES

- ▶ Putting Green
- ▶ Driving Ranges
- ▶ Bocce Ball
- ▶ Tennis Court
- ▶ Landscape
- ▶ Medium-Heavy Traffic




15 Year Manufacturer's Warranty

8 Year Manufacturer's High Traffic Warranty



Flo-Rite Drainage Technology

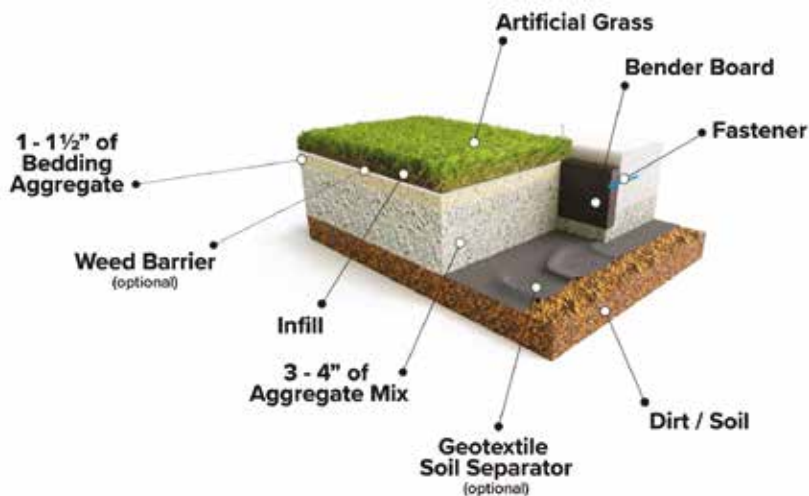

SPECIFICATIONS

Pile Height: 1/2"

Turf Gauge: 3/16

Face Weight: 44 oz./yd²

Backing Weight: 13 oz./yd²

Total Weight: 57 oz./yd²

Stitch Rate: 34/10 cm

Stitches/m²: 21420

Material/Dtex: PP6000

Color: Medium Bi-Color Green

Type Of Fiber: Polypropylene Monofilament

Infill Amount: 2.0 lbs, #30 Green Sand

Primary Backing: Premium GST Backing

Tuft Bind: 8+ lb/force (ASTM D1335)

Permeability: 71.0 inches/hr. (ASTM F1551)

Melting Point: 150 °F (ASTM D2859)

Grab Tear MD: >300 lbs/force (ASTM D5034)

Grab Tear CMD: >200 lbs/force (ASTM D5034)

Roll Width: 15 ft

Roll Length: 100 ft

Sq. Ft. Per Roll: 1500

Total Roll Weight: 686 lbs